

0~ +50

DC 12V

-30~ +70


24W

10~ 95% @ 10


5~ 500Hz, 1.5G, 0.15mm

10G/peak (11ms)

I/O

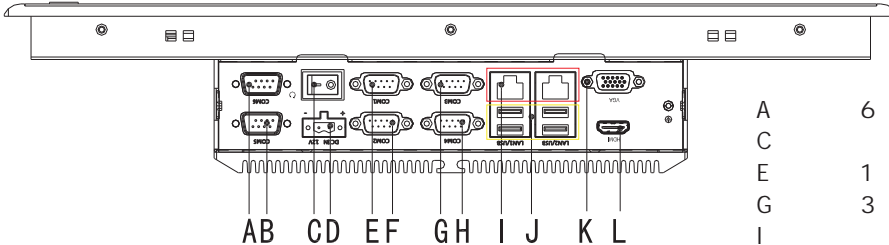

A	6	B	5
C		D	DC IN
E	1	F	2
G	3	H	4
I		J	USB 2.0*3/USB 3.0*1
K	VGA	L	HDMI

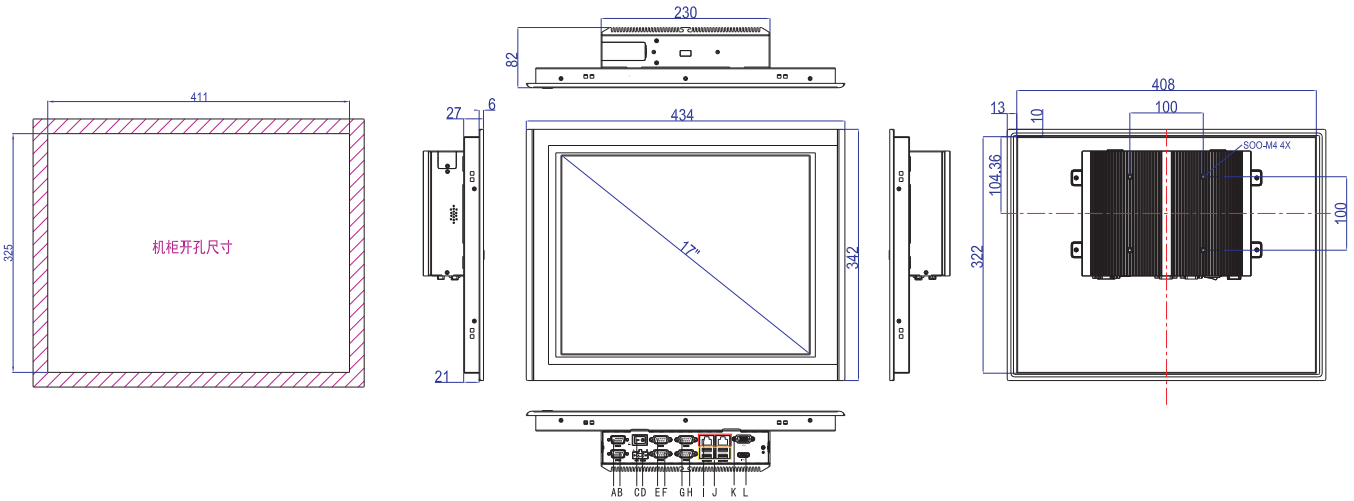

TPC6000-A172-T	:17" TFT LCD /	1280×1024 /	/ J1900 CPU / 2×LAN / 1×USB 3.0 / 3×USB 2.0 / 5×RS232 / 1×RS232 or RS485 / 1×HDMI / 1×VGA / DC 12V
TPC6000-A172-TW	:17" TFT LCD /	1280×1024 /	/ J1900 CPU / 2×LAN / 1×USB 3.0 / 3×USB 2.0 / 5×RS232 / 1×RS232 or RS485 / 1×HDMI / 1×VGA / WIFI
TPC6000-A172-T-2G	:17" TFT LCD /	1280×1024 /	/ J1900 CPU / 2×LAN / 1×USB 3.0 / 3×USB 2.0 / 5×RS232 / 1×RS232 or RS485 / 1×HDMI / 1×VGA / DDR3 2G
TPC6000-A172-TW-2G	:17" TFT LCD /	1280×1024 /	/ J1900 CPU / 2×LAN / 1×USB 3.0 / 3×USB 2.0 / 5×RS232 / 1×RS232 or RS485 / 1×HDMI / 1×VGA / DDR3 2G
TPC6000-A172-T-2G-SSD16G	:17" TFT LCD /	1280×1024 /	/ J1900 CPU / 2×LAN / 1×USB 3.0 / 3×USB 2.0 / 5×RS232 / 1×RS232 or RS485 / 1×HDMI / 1×VGA / DDR3 2G
TPC6000-A172-TW-2G-SSD16G	:17" TFT LCD /	1280×1024 /	/ J1900 CPU / 2×LAN / 1×USB 3.0 / 3×USB 2.0 / 5×RS232 / 1×RS232 or RS485 / 1×HDMI / 1×VGA / DDR3 2G
TPC6000-A172-TA	:17" TFT LCD /	1280×1024 /	/ J1900 CPU / 2×LAN / 1×USB 3.0 / 3×USB 2.0 / 4×RS232 / 1×RS232 or RS485 / 1×RS485 / 1×HDMI / 1×VGA
TPC6000-A172-TAW	:17" TFT LCD /	1280×1024 /	/ J1900 CPU / 2×LAN / 1×USB 3.0 / 3×USB 2.0 / 4×RS232 / 1×RS232 or RS485 / 1×RS485 / 1×HDMI / 1×VGA
TPC6000-A172-TA-2G	:17" TFT LCD /	1280×1024 /	/ J1900 CPU / 2×LAN / 1×USB 3.0 / 3×USB 2.0 / 4×RS232 / 1×RS232 or RS485 / 1×RS485 / 1×HDMI / 1×VGA
TPC6000-A172-TAW-2G	:17" TFT LCD /	1280×1024 /	/ J1900 CPU / 2×LAN / 1×USB 3.0 / 3×USB 2.0 / 4×RS232 / 1×RS232 or RS485 / 1×RS485 / 1×HDMI / 1×VGA
TPC6000-A172-TA-2G-SSD16G	:17" TFT LCD /	1280×1024 /	/ J1900 CPU / 2×LAN / 1×USB 3.0 / 3×USB 2.0 / 4×RS232 / 1×RS232 or RS485 / 1×RS485 / 1×HDMI / 1×VGA
TPC6000-A172-TAW-2G-SSD16G	:17" TFT LCD /	1280×1024 /	/ J1900 CPU / 2×LAN / 1×USB 3.0 / 3×USB 2.0 / 4×RS232 / 1×RS232 or RS485 / 1×RS485 / 1×HDMI / 1×VGA
TPC6000-A172-TB	:17" TFT LCD /	1280×1024 /	/ J1900 CPU / 2×LAN / 1×USB 3.0 / 3×USB 2.0 / 3×RS232 / 1×RS232 or RS485 / 2×RS485 / 1×HDMI / 1×VGA
TPC6000-A172-TBW	:17" TFT LCD /	1280×1024 /	/ J1900 CPU / 2×LAN / 1×USB 3.0 / 3×USB 2.0 / 3×RS232 / 1×RS232 or RS485 / 2×RS485 / 1×HDMI / 1×VGA
TPC6000-A172-TB-2G	:17" TFT LCD /	1280×1024 /	/ J1900 CPU / 2×LAN / 1×USB 3.0 / 3×USB 2.0 / 3×RS232 / 1×RS232 or RS485 / 2×RS485 / 1×HDMI / 1×VGA
TPC6000-A172-TBW-2G	:17" TFT LCD /	1280×1024 /	/ J1900 CPU / 2×LAN / 1×USB 3.0 / 3×USB 2.0 / 3×RS232 / 1×RS232 or RS485 / 2×RS485 / 1×HDMI / 1×VGA
TPC6000-A172-TB-2G-SSD16G	:17" TFT LCD /	1280×1024 /	/ J1900 CPU / 2×LAN / 1×USB 3.0 / 3×USB 2.0 / 3×RS232 / 1×RS232 or RS485 / 2×RS485 / 1×HDMI / 1×VGA
TPC6000-A172-TBW-2G-SSD16G	:17" TFT LCD /	1280×1024 /	/ J1900 CPU / 2×LAN / 1×USB 3.0 / 3×USB 2.0 / 3×RS232 / 1×RS232 or RS485 / 2×RS485 / 1×HDMI / 1×VGA

2G /16G
2G/4G/8G
16G/32G/64G/128G
500G/1T