

TPC6000-A 2152

产品特性：

PET IP65

21.5" TFT LCD 1920*1080

Intel Bay Trail J1900 2.0GHz

2 6 RS232 (COM1/COM5/6 RS485)

DC 12V

WIFI/3G/4G

VESA




	Intel Bay Trail J1900 2.0GHz, TDP 10W
	DDR3 2G/4G/8G
	1*Serial ATA 2.0 +1*mSATA
	HDMI/VGA
	1 255
	Win 7 / Win8 / WES7 / Linux / Win 10
I/O	
	2 Realtek RTL8111F
USB	1 USB3.0 3 USB2.0 , 8KV
	6 RS232(COM1/COM5/6 RS485)
	1 ~ 2W
	1 Mini-PCle 3G/4G/Wifi USB
	DC IN HDMI*1 VGA*1
	21.5" TFT 1920*1080
	LED / 30000 h
	250cd/m ²
	476.64*268.11 mm
	21.5"
	4096*4096
	3500 250 500 250
	81%
	, PET , NEMA IP65 550*342*88mm
	, 532*322*80mm
	533*325mm
VESA	8KG


-A

0~ + 50 . DC 12V
 -30~ + 70 38W
 10~ 95% @ 10
 5~ 500Hz, 1.5G, 0.15mm
 10G/peak (11ms)

I/O

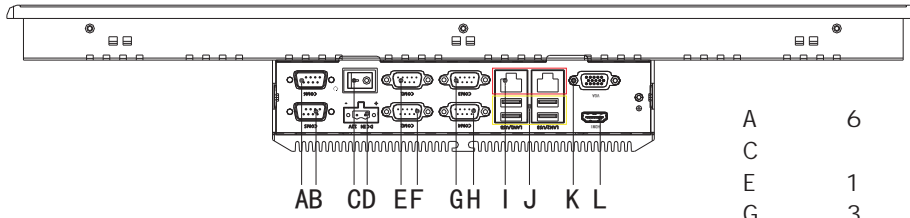

A	6	B	5
C		D	DC IN
E	1	F	2
G	3	H	4
I		J	USB 2.0*3/USB 3.0*1
K	VGA	L	HDMI

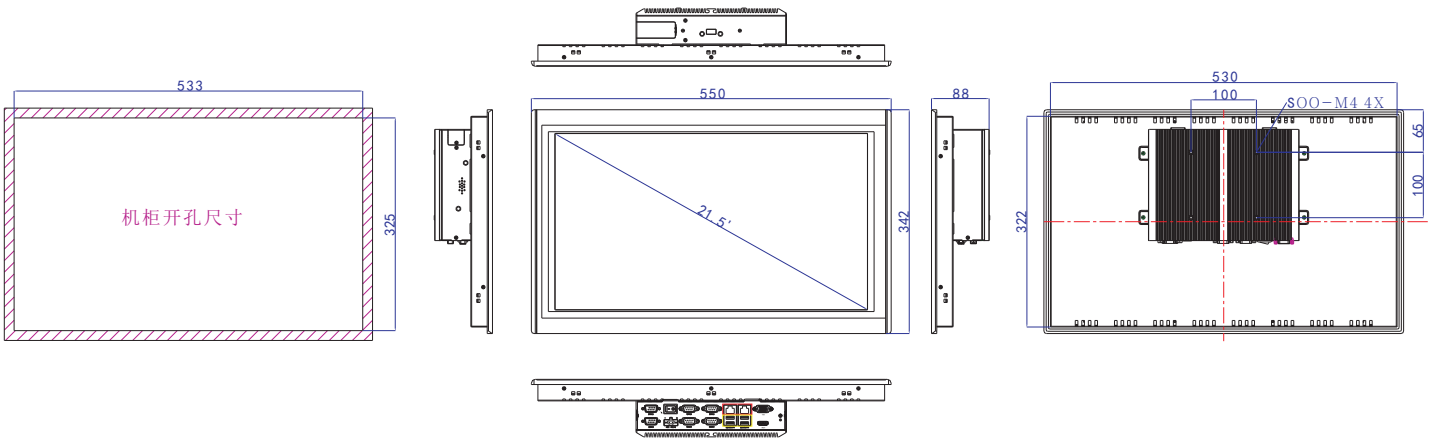

TPC6000-A2152-T	:21.5" TFT LCD /	1920x1080 /	/ J1900 CPU / 2xLAN / 1xUSB 3.0 / 3xUSB 2.0 / 5xRS232 / 1xRS232 or RS485 / 1xHDMI / 1xVGA / DC 12V
TPC6000-A2152-TW	:21.5" TFT LCD /	1920x1080 /	/ J1900 CPU / 2xLAN / 1xUSB 3.0 / 3xUSB 2.0 / 5xRS232 / 1xRS232 or RS485 / 1xHDMI / 1xVGA / WIFI / DC 12V
TPC6000-A2152-T-2G	:21.5" TFT LCD /	1920x1080 /	/ J1900 CPU / 2xLAN / 1xUSB 3.0 / 3xUSB 2.0 / 5xRS232 / 1xRS232 or RS485 / 1xHDMI / 1xVGA / DDR3 2G / DC 12V
TPC6000-A2152-TW-2G	:21.5" TFT LCD /	1920x1080 /	/ J1900 CPU / 2xLAN / 1xUSB 3.0 / 3xUSB 2.0 / 5xRS232 / 1xRS232 or RS485 / 1xHDMI / 1xVGA / DDR3 2G / WIFI / DC 12V
TPC6000-A2152-T-2G-SSD16G	:21.5" TFT LCD /	1920x1080 /	/ J1900 CPU / 2xLAN / 1xUSB 3.0 / 3xUSB 2.0 / 5xRS232 / 1xRS232 or RS485 / 1xHDMI / 1xVGA / DDR3 2G / mSATA 16G / DC 12V
TPC6000-A2152-TW-2G-SSD16G	:21.5" TFT LCD /	1920x1080 /	/ J1900 CPU / 2xLAN / 1xUSB 3.0 / 3xUSB 2.0 / 5xRS232 / 1xRS232 or RS485 / 1xHDMI / 1xVGA / DDR3 2G / mSATA 16G / WIFI / DC 12V
TPC6000-A2152-TA	:21.5" TFT LCD /	1920x1080 /	/ J1900 CPU / 2xLAN / 1xUSB 3.0 / 3xUSB 2.0 / 4xRS232 / 1xRS232 or RS485 / 1xRS485 / 1xHDMI / 1xVGA / DC 12V
TPC6000-A2152-TAW	:21.5" TFT LCD /	1920x1080 /	/ J1900 CPU / 2xLAN / 1xUSB 3.0 / 3xUSB 2.0 / 4xRS232 / 1xRS232 or RS485 / 1xRS485 / 1xHDMI / 1xVGA / WIFI / DC 12V
TPC6000-A2152-TA-2G	:21.5" TFT LCD /	1920x1080 /	/ J1900 CPU / 2xLAN / 1xUSB 3.0 / 3xUSB 2.0 / 4xRS232 / 1xRS232 or RS485 / 1xRS485 / 1xHDMI / 1xVGA / DDR3 2G / DC 12V
TPC6000-A2152-TAW-2G	:21.5" TFT LCD /	1920x1080 /	/ J1900 CPU / 2xLAN / 1xUSB 3.0 / 3xUSB 2.0 / 4xRS232 / 1xRS232 or RS485 / 1xRS485 / 1xHDMI / 1xVGA / DDR3 2G / WIFI / DC 12V
TPC6000-A2152-TA-2G-SSD16G	:21.5" TFT LCD /	1920x1080 /	/ J1900 CPU / 2xLAN / 1xUSB 3.0 / 3xUSB 2.0 / 4xRS232 / 1xRS232 or RS485 / 1xRS485 / 1xHDMI / 1xVGA / DDR3 2G / mSATA 16G / DC 12V
TPC6000-A2152-TAW-2G-SSD16G	:21.5" TFT LCD /	1920x1080 /	/ J1900 CPU / 2xLAN / 1xUSB 3.0 / 3xUSB 2.0 / 4xRS232 / 1xRS232 or RS485 / 1xRS485 / 1xHDMI / 1xVGA / DDR3 2G / mSATA 16G / WIFI / DC 12V
TPC6000-A2152-TB	:21.5" TFT LCD /	1920x1080 /	/ J1900 CPU / 2xLAN / 1xUSB 3.0 / 3xUSB 2.0 / 3xRS232 / 1xRS232 or RS485 / 2xRS485 / 1xHDMI / 1xVGA / DC 12V
TPC6000-A2152-TBW	:21.5" TFT LCD /	1920x1080 /	/ J1900 CPU / 2xLAN / 1xUSB 3.0 / 3xUSB 2.0 / 3xRS232 / 1xRS232 or RS485 / 2xRS485 / 1xHDMI / 1xVGA / WIFI / DC 12V
TPC6000-A2152-TB-2G	:21.5" TFT LCD /	1920x1080 /	/ J1900 CPU / 2xLAN / 1xUSB 3.0 / 3xUSB 2.0 / 3xRS232 / 1xRS232 or RS485 / 2xRS485 / 1xHDMI / 1xVGA / DDR3 2G / DC 12V
TPC6000-A2152-TBW-2G	:21.5" TFT LCD /	1920x1080 /	/ J1900 CPU / 2xLAN / 1xUSB 3.0 / 3xUSB 2.0 / 3xRS232 / 1xRS232 or RS485 / 2xRS485 / 1xHDMI / 1xVGA / DDR3 2G / WIFI / DC 12V
TPC6000-A2152-TB-2G-SSD16G	:21.5" TFT LCD /	1920x1080 /	/ J1900 CPU / 2xLAN / 1xUSB 3.0 / 3xUSB 2.0 / 3xRS232 / 1xRS232 or RS485 / 2xRS485 / 1xHDMI / 1xVGA / DDR3 2G / mSATA 16G / DC 12V
TPC6000-A2152-TBW-2G-SSD16G	:21.5" TFT LCD /	1920x1080 /	/ J1900 CPU / 2xLAN / 1xUSB 3.0 / 3xUSB 2.0 / 3xRS232 / 1xRS232 or RS485 / 2xRS485 / 1xHDMI / 1xVGA / DDR3 2G / mSATA 16G / WIFI / DC 12V

2G /16G
 2G/4G/8G
 16G/32G/64G/128G
 500G/1T